
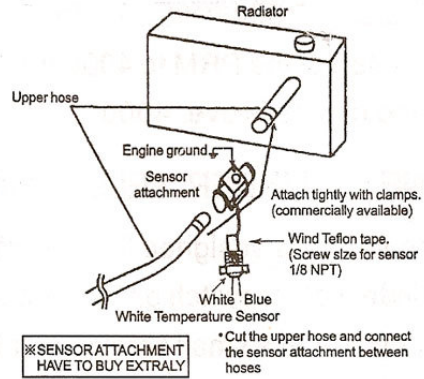



# INSTALLATION INSTRUCTIONS

## 3.75" 3 IN 1 PERFORMANCE TACHOMETER

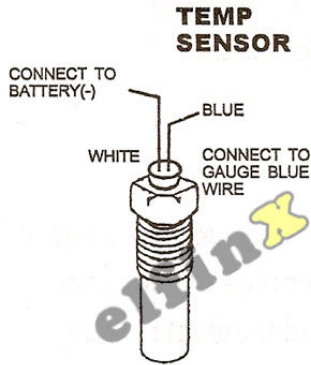


### Mounting

The special design of the tachometer base allows for a variety of mounting possibilities. Attach the base using screws provided or use pop rivet tool.



### Wiring

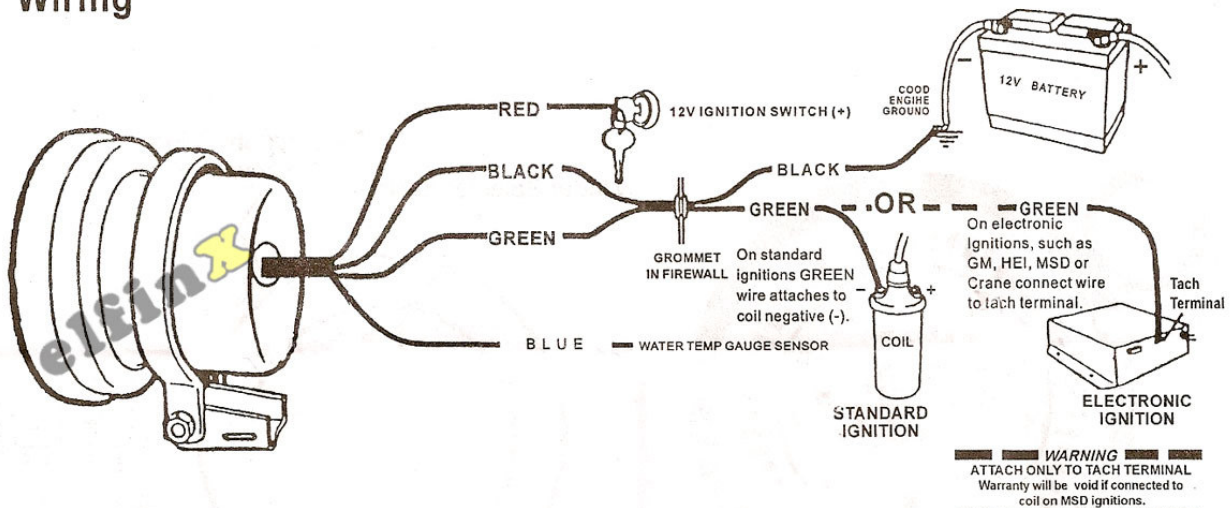

**NOTE:**The water temp gauge sensor is the same as oil temp gauge sensor.

Set the "RPM" warning light.

- 1、 First of all, start engine, begin to set up and alarm, "RED LAMP" indicator is on.
- 2、 When press the button "MODE" , the "RED LAMP" indicator is off and the "YELLOW LAMP" on. Press the button "△" , the index runs upwards, then press "▽" the index downwards. When you fix on the position of "RPM" , the "YELLOW LAMP" is off ,and the "RED LAMP" on, the index returns to "0" automatically.
- 3、 For example: set the PRM to 4000 turns, the warning light is on if the PRM of the engine is over 4000.

#### 4、 ENGINE CYLINDER SELECTION

The tachometer is designed for use with 3-, 4-, 6-, and 8-cylinder engines only. The cylinder select switch on the rear of the tachometer must be set prior to installation. Use your finger or a small screwdriver to slide the cylinder select switch to the appropriate position; 3, 4, 6, or 8.

#### 5、 MOUNTING

You can mount your tach on or under the dashboard or on the center console according to your personal choice. Determine best position for good visibility before drilling screw holes.

